

**DRAFT FINAL
ARCHITECTURAL BARRIERS ACT
(ABA)
ACCESSIBILITY GUIDELINES**

**Camping Facilities
Picnic Facilities
Viewing Areas
Trails
Beach Access Routes**

Session Agenda

- Background on draft final guidelines
- Application
- Format and organization
- Outdoor constructed features
- Camping facilities

Session Agenda (con't)

- Picnic facilities
- Viewing areas
- Outdoor recreation access routes
- Trails
- Beach access routes

Background on Draft Final Guidelines

- Regulatory Negotiation Committee Final Report
- Notice of Proposed Rulemaking (NPRM)
- Comment period
- Working with our Federal partners and Board members on final guidelines
- Draft final guidelines available for review


Application

- **Architectural Barriers Act of 1968, as amended 42 U.S.C. §§ 4151 et seq. (ABA)** requires access to buildings and facilities constructed or altered –
 - by or on behalf of the Federal government; or
 - with Federal grants and loans

Application

- Final guidelines will apply to outdoor developed facilities “constructed or altered by or on behalf of the Federal government”
- Future rulemaking will apply guidelines to facilities constructed or altered -
 - “with Federal grants or loans” (ABA)
 - covered by Title II or III of the ADA

ADA-ABA Accessibility Guidelines Format and organization

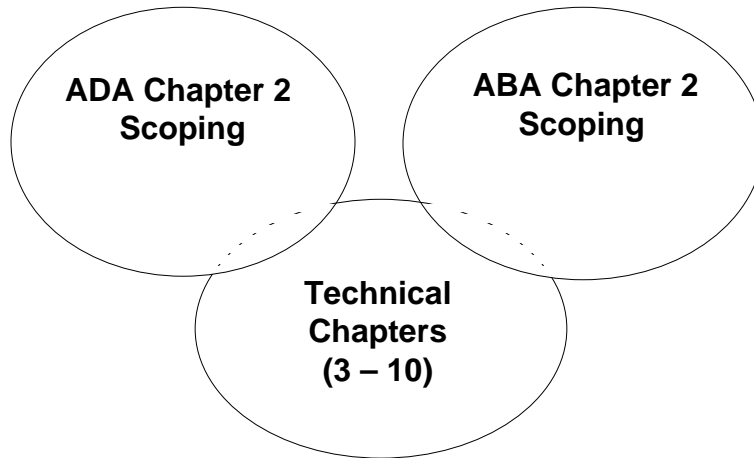

Format and organization

- ABA Chapter 2:
Scoping Requirements
- F244 Camping Facilities
- F245 Picnic Facilities
- F246 Viewing Areas
- F247 Trails
- F248 Beach Access Routes

Format and organization

- Chapter 10: Recreation Facilities
 - 1011 Outdoor Constructed Features
 - 1012 Parking Spaces within Accessible Camping Units and Picnic Units
 - 1013 Tent Pads and Tent Platforms
 - 1014 Camp Shelters
 - 1015 Viewing Areas
 - 1016 Outdoor Recreation Access Routes
 - 1017 Trails
 - 1018 Beach Access Routes
 - 1019 Conditions for Exceptions

Outdoor constructed features

- Picnic tables
- Fire rings
- Grills
- Fireplaces and woodstoves
- Trash and recycling containers
- Water hydrants
- Utility and sewage hookups
- Outdoor rinsing showers
- Benches
- Telescopes and periscopes

Outdoor constructed features

- Picnic tables – one wheelchair space for each 24 linear feet of usable table surface, knee and toe clearance required at space (306)
- Fire rings, grills, fireplaces, and woodstoves –
 - fire building surface - 9 inches minimum above ground
 - cooking surface – 15 inches minimum – 34 inches maximum above ground

Outdoor constructed features

- Water spouts – 28 inches minimum – 36 inches maximum
- Outdoor rinsing showers – at least two fixed heads
 - 48 inches minimum – 54 inches maximum
 - exception where hand held is provided
 - 72 inches minimum

Outdoor constructed features

- Telescopes and periscopes
 - eyepieces located between 43 inches minimum and 51 inches maximum
- Operable parts – exceptions for several features



Outdoor constructed features

- Clear ground space – exception where feature is altered, but surface is not OR where conditional exceptions permit departures in alterations
- Size and location – addressed in a table for each element
- Surface – firm and stable
- Surface slope – 1:33 except asphalt, concrete, or boards = 1:48 maximum
- Openings – (302.3)

Outdoor Constructed Feature	Minimum Size and Location
Picnic tables	36 inches along all usable sides of the table
Fire rings, grills, fireplaces, and woodstoves	48 inches by 48 inches on all usable sides of the fire ring, grill, fireplace, or woodstove Center the space on each usable side

UNITED STATES ACCESS BOARD

15

Outdoor Constructed Feature	Minimum Size and Location
Trash and recycling receptacles	36 inches by 48 inches positioned for forward approach to the receptacle opening; or 30 inches by 60 inches positioned for a parallel approach

UNITED STATES ACCESS BOARD

16

Outdoor Constructed Feature	Minimum Size and Location
Water hydrants	48 inches by 72 inches Locate the space so that the water spout is 11 inches minimum and 12 inches maximum from the rear center of the long side of the space

UNITED STATES ACCESS BOARD

17

Outdoor Constructed Feature	Minimum Size and Location
Utility and sewage hookups	30 inches by 60 inches Locate space so that the hook-ups are at the rear center Bollards may not obstruct the clear ground space
Outdoor rinsing showers	60 inches by 60 inches centered on the shower heads Locate the space so that the shower pedestal is at the rear end of the space

UNITED STATES ACCESS BOARD

18

Outdoor Constructed Feature	Minimum Size and Location
Benches	36 inches by 48 inches positioned near the bench Clear ground space may not overlap the outdoor recreation access route or trail
Telescopes and periscopes	36 inches by 48 inches positioned for forward approach Eyepiece centered on the space Knee and toe clearance complying with 306

UNITED STATES ACCESS BOARD

19

Picnic facilities

- Two new terms
 - Picnic facility – developed for outdoor recreational purposes that contains picnic units
 - Picnic unit – outdoor space in a picnic facility that contains outdoor constructed features



UNITED STATES ACCESS BOARD

20

Picnic facilities

- At least 20% of picnic units in picnic facility where two or more picnic units are provided
- Two or fewer = each accessible
- 20% of outdoor constructed features in public and common use areas serving accessible picnic units
- Dispersion of accessible picnic units required
- ORAR connection

Camping facilities

- Two new terms
 - Camping facility – developed for outdoor recreational purposes that contains camping units
 - Camping unit – outdoor space in a camping facility that contains outdoor constructed features, RV parking spaces, tent pads or tent platforms, or camp shelters

Camping facilities

Total Number of Camping Units Provided in Camping Facility	Minimum Number of Accessible Camping Units Required
1	1
2 to 25	2
26 to 50	3
51 to 75	4
76 to 100	5
101 to 150	7
151 to 200	8
201 and over	8, plus 2 percent of the number over 200

Camping facilities

- Applies to each type of camping unit provided
- Dispersion of accessible camping units required
- Multiple features within accessible units = 20% but at least 2
- At least 20% of outdoor constructed features in public and common use areas serving accessible camping units
- ORAR connection

Camping facilities

- Parking spaces within accessible camping units
 - RV space – 20 feet wide minimum, exception for 16 feet where two adjacent spaces are provided
 - Other vehicles – 16 feet wide minimum
 - Surface – firm and stable
 - Slope - 1:33 maximum, except asphalt, concrete, or boards = 1:48

Camping facilities

- Tent pads and tent platforms
 - Clear ground space – 48 inches on all usable sides, exception where conditional exceptions apply
 - Surface – stable and firm
 - Slope – 1:33 maximum, except asphalt, concrete, or boards = 1:48
 - Tent platform – 19 inches maximum above surface

Camping facilities

- Camp shelters – conditional exceptions may apply
 - Clear ground space at entrance – 36 inches minimum by 48 inches minimum
 - Surface – firm and stable
 - Slope – 1:33 maximum, except asphalt, concrete, or boards = 1:48
 - Floor height where elevated at entrance - 19 inches maximum above ground
 - Where level entry or ramped entry is provided – turning space required

Viewing areas

- Outdoor space developed for viewing a landscape or point of interest
- 20% of each type of outdoor constructed feature
- ORAR connection

Viewing areas

- Clear ground space –
 - at each distinct viewing location
 - 36 inches minimum by 48 inches minimum positioned for forward or parallel approach
 - one full unobstructed side of space to adjoin or overlap an ORAR, trail, or another clear ground space

Conditional exceptions permitted when altering existing viewing areas

Viewing areas

- Unobstructed view
 - provided between 32 inches and 51 inches above the clear ground space
 - exception where guardrails or other safety barriers are provided to protect visitors from drop-offs
- Turning space required
- Surface – firm and stable
- Slope – 1:33 maximum, except asphalt, concrete, or boards = 1:48

Outdoor recreation access routes

- Camping facilities, picnic facilities, viewing areas, and trailheads ONLY
- Conditional exceptions permitted when altering existing ORAR
- Where ORAR are provided within vehicular ways – exception for passing spaces, slope, and resting intervals
- Adjacent recreation facilities

Outdoor recreation access routes

- Surface – firm and stable
- Clear width – 36 inches minimum
- Passing space – required where width is less than 60 inches
- Obstacles – 1 inch maximum, except concrete, asphalt, or boards = ½ inch
- Openings – (302.3)

Outdoor recreation access routes

Running Slope of Segment of Outdoor Recreation Access Route		Maximum Length of Segment
Steeper than	But not Steeper than	
1:20	1:12	50 feet (15 m)
1:12	1:10	30 feet (9 m)

Outdoor recreation access routes

- Cross slope – 1:33 maximum, except concrete, asphalt, or boards = 1:48
- Resting intervals – 60 inches in length minimum, adjacent to ORAR - turning space
- Protruding object – constructed elements

Trails

- Pedestrian route developed primarily for outdoor recreational purposes
- Newly constructed/altered trail directly connected to a trailhead or another trail complying with guidelines
- Conditional exceptions permitted – new and altered
- Shared use paths to be addressed in upcoming rulemaking

Trailheads

- Outdoor space developed to serve as an access point to a trail
 - Not a junction of two or more trails where no other access point is provided
- 20% of each type of outdoor constructed feature provided within trailhead to be accessible

Trail signs

- New signs provided at trailheads on newly constructed or altered trails
- Required information
 - length of the trail or trail segment
 - surface type
 - tread width (typical/minimum)
 - running and cross slope (typical/maximum)



Trails

- Surface – firm and stable
- 36 inches minimum width
- Passing spaces – every 1,000 feet where less than 60 inches in width
- Tread obstacles – 2 inches maximum, except concrete, asphalt, or board = $\frac{1}{2}$ inch
- Openings – $\frac{1}{2}$ inch maximum (302.3)

Trails

Running Slope of Trail Segment		Maximum Length of Segment
Steeper than	But not Steeper than	
1:20	1:12	200 feet (61 m)
1:12	1:10	30 feet (9 m)
1:10	1:8	10 feet (3050 mm)

Trails

- Cross slope – 1:20 maximum, except for concrete, asphalt, or boards = 1:48
- Resting intervals – 60 inches long, alongside trail - turning space, slope 1:20 maximum, except concrete, asphalt, or boards = 1:48
- Protruding objects – applies to “constructed features”
- Gates and barriers – clear width, gate hardware

Conditional exceptions

- Apply on a provision-by-provision basis
- Where full compliance with a technical provision is not possible because of the limitations and constraints included in the conditional exceptions...
- “maximum extent feasible”

Conditional exceptions

- Document where conditional exceptions are used for specific provisions for trails and beach access routes
- Include in project file
 - Documentation not required where conditional exceptions are used for outdoor constructed features, outdoor recreation access routes, tent pads and platforms, camp shelters or viewing areas

Conditional exceptions

- When applying conditional exceptions to portions of the trail results in exempting the entire trail or beach access route from the technical provisions...
- Notify the Board where an entire trail or beach access route is exempted
- Technical assistance available

Conditional exceptions

- Compliance is not feasible due to terrain
- Compliance cannot be accomplished with the prevailing construction practices



Conditional exceptions

- Compliance would fundamentally alter the function or purpose of the facility or the setting
- Compliance is precluded by the:
 - Endangered Species Act;
 - National Environmental Policy Act;
 - National Historic Preservation Act;
 - Wilderness Act; or
 - Other Federal, State, or local laws

Beach access routes

Where required—

The construction or alteration of any of the following facilities to serve the beach:

1. Circulation paths;
2. Parking facilities;
3. Toilet facilities; or
4. Bathing facilities

Exception limits the cost of the beach access route to no more than 20 percent of the cost of constructing or altering the facilities

Beach access routes

- Where required
 - Where an entity undertakes a beach nourishment project, a beach access route is required
 - Exception limits the cost of the beach access route to no more than 20% of the cost of a beach nourishment project

Beach access routes

- Permanent or removable
- Minimum number – at least one for each ½ mile of shoreline managed by the entity
 - Not required to exceed the number of pedestrian access points to a beach provided by the entity



Beach access routes

- Connections -
 - High tide level
 - Mean high water
 - Normal recreation pool
- Clear width - 60 inches wide minimum
- Surface - firm and stable
- Obstacles - 1 inch maximum, except concrete, asphalt, or boards = ½ inch
- Openings - (302.3)

Beach access routes

Running Slope of Segment of Beach Access Route		Maximum Length of Segment
Steeper than	But not Steeper than	
1:20	1:12	50 feet (15 m)
1:12	1:10	30 feet (9 m)

Beach access routes

- Exception for slope and resting intervals where removable surface is used
- Cross slope – 1:33 maximum, except concrete, asphalt, or boards = 1:48
- Resting intervals – 60 inches by 60 inches
- Protruding objects – constructed element

Beach access routes

- Elevated dune crossings
 - Where part of beach access routes
 - Handrails
 - Edge protection
 - Clear width 48 inches minimum
 - No requirement for resting intervals

Next steps

- Review comments
- Complete Regulatory Flexibility Analysis/NEPA
- Submit to OMB
- Publish final
- Publish technical assistance material
- Adoption by standard setting agencies
- Rulemaking under the ADA and ABA (Federal grants and loans)

Comment period

- Comment deadline - **December 18, 2009**
- Federal eRulemaking Portal:
<http://www.regulations.gov>
- Regulations.gov ID - ATBCB-2009-0006
- E-mail: outdoor@access-board.gov
- Fax: 202-272-0081

How to reach the Board

(800) 872-2253
OR (202) 272-0080

Bill Botten 202 272-0014
Peggy Greenwell 202 272-0017

outdoor@access-board.gov
botten@access-board.gov
greenwell@access-board.gov